

FEATURES

The NAC sight glass is designed for the visual inspection of flow for fluids inside piping.
Made of brass with and a borosilicate glass, it is especially designed for process fluids.
Installation in all positions.

AVAILABLE MODELS

NAC : G 1/4" to G 1/2"
G thread connections.



LIMITS OF USE


Fluide WP :	10 bar
Fluide WT :	+5°C / +70°C

DIRECTIVES AND MANUFACTURING STANDARDS

OBJET	Standard
Pressure Equipment Directive 2014/68	A4 § 3 : non soumis
Threaded connection	ISO 228

DIMENSIONS (mm) AND WEIGHT (kg)

DN	L	AF (Tightening key)	D	d	E	Weight (kg)
G 1/4"	70	19	1/4"	5	12	0,085
G 3/8"	70	27	3/8"	8	12	0,170
G 1/2"	80	32	1/2"	12	15,5	0,280

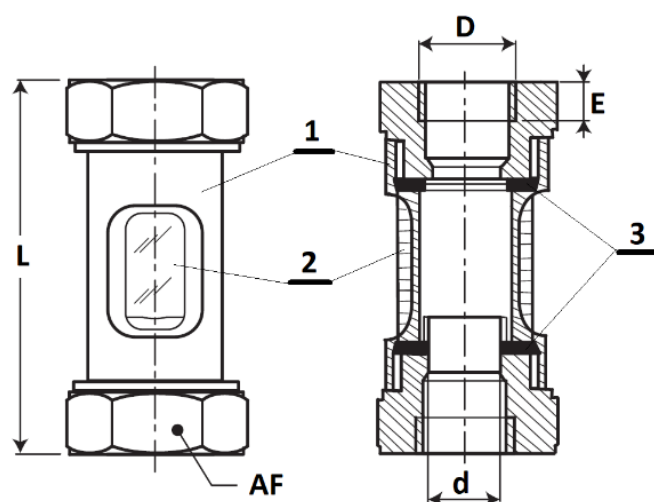

CONSTRUCTION

No.	Name	Material
1	Body	Brass
2	Glass	Borosilicate
3	Gaskets	FPM

INSTALLATION

Installation in all positions.

