




EPDM

Plumbing 

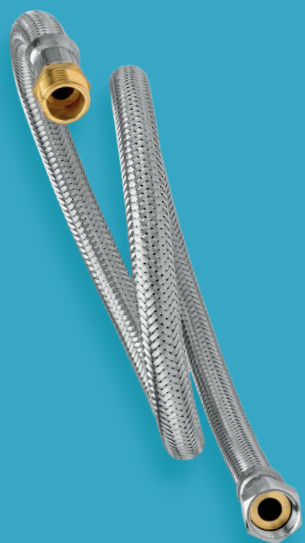

- 30°C
+ 90°C

certified temp. may deviate

BRAIDED EPDM HOSES


DN	NOM. PRESSURE	MAX. PRESSURE	BRAIDING AISI304L	HOSE DIAMETER
DN 6	10 BAR	20 BAR	INOX 8x0,18 mm	6,5x9,5 mm
DN 8	10 BAR	20 BAR	INOX 8x0,18 mm	8x11,2 mm
DN 10	10 BAR	20 BAR	INOX 8x0,22 mm	10x14 mm
DN 13	10 BAR	18 BAR	INOX 9x0,22 mm	13x17 mm
DN 15	10 BAR	16 BAR	INOX 9x0,22 mm	15x19,8 mm
DN 20	10 BAR	16 BAR	INOX 12x0,22 mm	19,5x26 mm
DN 25	8 BAR	10 BAR	INOX 12x0,22 mm	25x32 mm
DN 32	8 BAR	10 BAR	INOX 10x0,25 mm	32x42 mm
DN 40	6 BAR	10 BAR	INOX 10x0,25 mm	40x52 mm
DN 50	6 BAR	8 BAR	INOX 10x0,25 mm	50x62 mm

SLEEVES AND FITTINGS

DN	INOX SLEEVE DIMENSIONS	ALU SLEEVE DIMENSIONS	DIAMETER
DN 6	12x13x16 mm	-	4,5 mm
DN 8	13x14x18 mm	-	6 mm
DN 10	15,5x16,5x20 mm	-	7 mm
DN 13	20x22x24 mm	20x22x25 mm	10,5 mm
DN 15	23x24,4x29 mm	22x24x25 mm	12 mm
DN 20	30x32x35 mm	30x32x31 mm	15 mm
DN 25	36x38x35 mm	36x38x38 mm	19 mm
DN 32	45x47x46 mm	46x49x45 mm	25,5 mm
DN 40	55x57x62 mm	57x60x51 mm	32 mm
DN 50	67,6x70x57 mm	66,7x70x51 mm	41 mm

Our certified hoses are manufactured according to the European EN 13618 standards. And our fittings comply with the European standards EN ISO 228-1 (BSPP).

CERTIFICATIONS

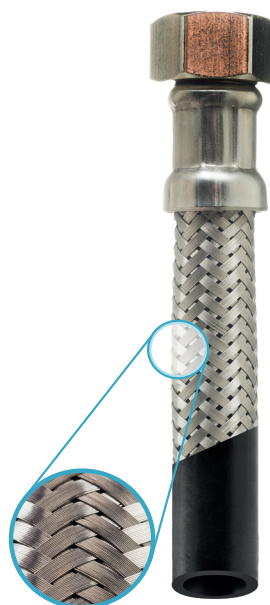

BRASS
CW617N*
*pb: 1,6%-2,2%
*N: ≤0,1%

STAINLESS STEEL

STAINLESS STEEL BRAIDING
AISI304

EPDM

QB
QUALITE POUR LE BATIMENT

ACS
ATTESTATION DE CONFORMITE SANITAIRES

FIXAFLEX
EN 13618 ISO 9001

kiwa

WRAS
APPROVED MATERIAL

* Certificates can depend on composition. please contact fixaflex to ensure correct certificate information.

LENGTH NBN EN 13618

LENGTH OF HOSE	TOLERANCE
L ≤ 400 mm	- 0 mm/ + 10 mm
400 mm < L ≤ 1000 mm	- 0 mm/ + 20 mm
1000 mm < L ≤ 2000 mm	- 0 mm/ + 30 mm

