

HIGH PRESSURE GAUGE VALVE BRASS MALE FEMALE BSP WITH ADJUSTING WHEEL

High pressure brass gauge valve male female for liquid and gas network, not for viscous or crystallizing liquid and not attacking copper alloys.

Stop or reducing valves for networks of liquids, gas and steam.

With adjusting wheel.



Size : DN1/2"

Connection : Male-Female BSP

Min Temperature : -10°C

Max Temperature : +120°C

Max Pressure : 250 Bars

Specifications : High pressure
Reduced bore
PTFE packing
With draining screw

Materials : Brass body CW617N according to EN 12165

HIGH PRESSURE GAUGE VALVE BRASS MALE FEMALE BSP WITH ADJUSTING WHEEL

SPECIFICATIONS :

- High pressure
- PTFE packing
- Reduced bore
- With draining screw

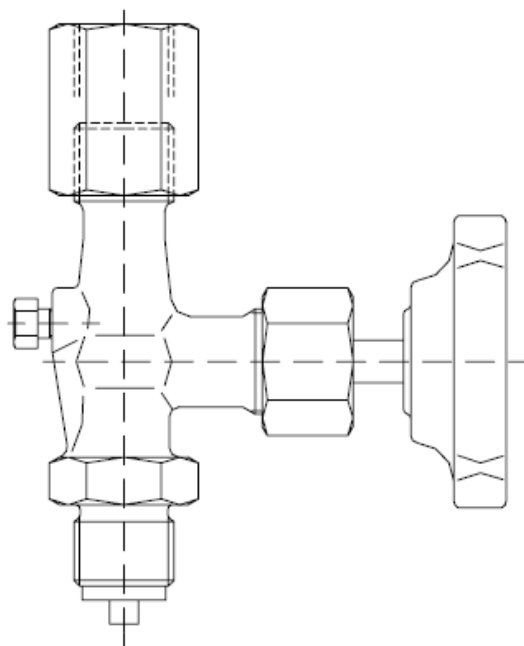
USE :

- Not for viscous or crystallizing liquid
- Min Temperature Ts : - 10 °C
- Max Temperature Ts : + 120°C
- Max Pressure Ps : 250 bars

RANGE :

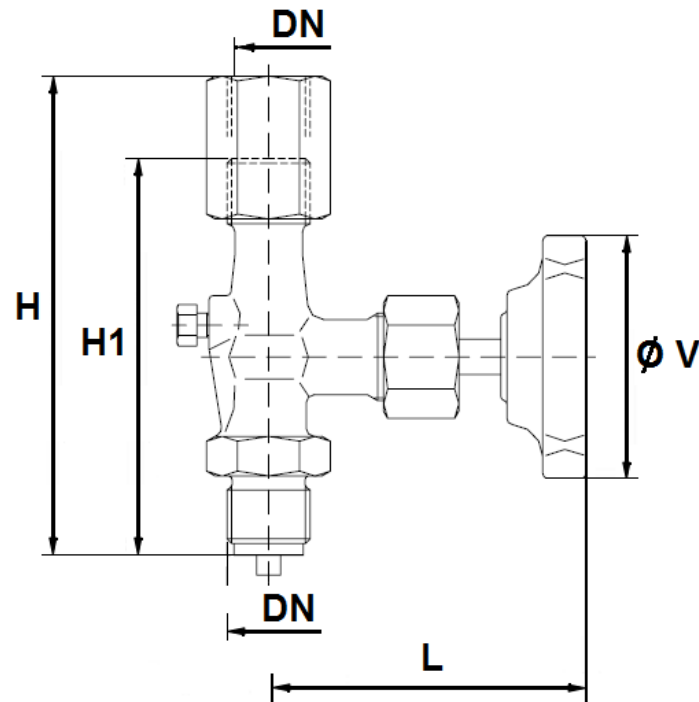
- High pressure gauge valve brass Male / Female BSP with adjusting wheel **Ref. 1390** DN 1/2"

HIGH PRESSURE GAUGE VALVE BRASS MALE FEMALE BSP WITH ADJUSTING WHEEL

MATERIALS :

Designation	Materials
Body	Brass CW 617 N according to EN 12165
Stem	S.S. 1.4104
Needle	
Packing	PTFE
Nut	Steel
Draining screw	S.S. 1.4571
Handwheel	Plastic

HIGH PRESSURE GAUGE VALVE BRASS MALE FEMALE BSP WITH ADJUSTING WHEEL

SIZE (in mm) :

Ref.	DN	1/2"
1390004	L	79
	H	119
	H1	100
	Ø V	63
	Weight (in Kg)	0.58

STANDARDS :

- Manufacturer certified ISO 9001 : 2015
- DIRECTIVE 2014/68/EU : Products excluded from directive (Article 1, § 2b)
- Threaded male and female BSP cylindrical ends according to ISO 228-1