

BRASS BALL VALVE WITH UNION FITTING MALE FEMALE BSP 4MS

Brass ball valves 4MS with removable union fitting full bore for water networks, heating, watering or cooling.

2 NBR O ring on anti blow-out stem.

Butterfly handle with Dacromet coating nut for a better corrosive resistance.



- Size :** DN1/2" to DN1"1/4
Connection : Male, Female BSP
Min Temperature : -10°C
Max Temperature : +80°C
Max Pressure : 25 Bars
Specifications : Anti blow-out stem
Removable union fitting
Full bore
2 NBR O-rings on stem
Materials : Brass EN 12165-CW617N-4MS

BRASS BALL VALVE WITH UNION FITTING MALE FEMALE BSP 4MS

SPECIFICATIONS :

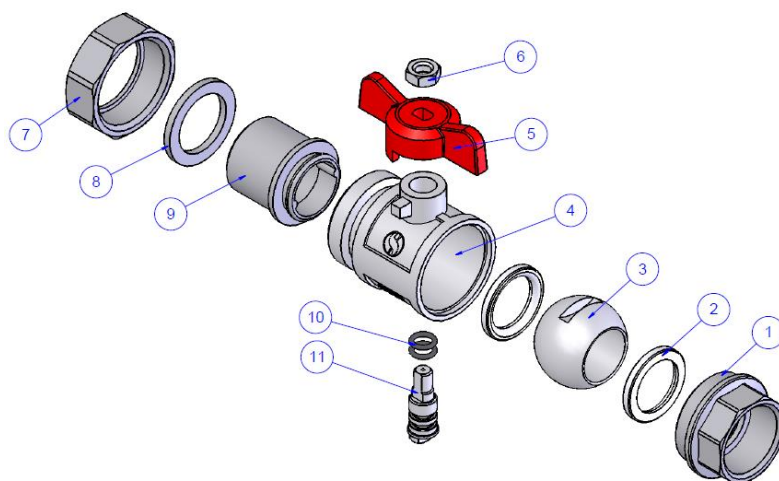
- Full bore
- Anti blow-out stem
- Solid ball
- With union fitting
- Butterfly handle

USE :

- Water, heating, watering or cooling
- Min Temperature Ts : - 10°C
- Max Temperature Ts : + 80°C
- Max Pressure Ps : 25 bars

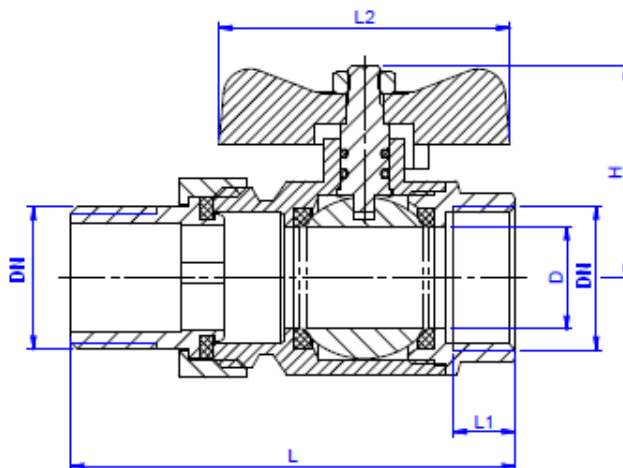
RANGE :

- Male / Female with union fitting **Ref. 524** from DN1/2" to DN1"1/4

MATERIALS :

Item	Designation	Materials
1	Bonnet	Nickeled Brass CW617N-4MS according to EN 12165
2	Seat	PTFE
3	Ball	Chromed Brass
4	Body	Nickeled Brass CW617N-4MS according to EN 12165
5	Butterfly handle	Aluminium
6	Nut	Steel Dacromet coated
7	Union nut	Brass CW617N-4MS according to EN 12165
8	Rubber washer	NBR
9	Tailpiece	Brass CW617N-4MS according to EN 12165
10	O-ring	NBR
11	Stem	Nickeled brass

BRASS BALL VALVE WITH UNION FITTING MALE FEMALE BSP 4MS

SIZE (in mm) :

DN	1/2"	3/4"	1"	1"1/4
Ø D	14.5	19	24	30
L	74.5	82.5	94	114
L1	11	11.5	12	13.5
L2	54	54	70	70
H	35.3	38.8	48.3	56.5
Weight (Kg)	0.21	0.3	0.51	0.76
Ref.	524004	524005	524006	524007

STANDARDS :

- Manufacturer certified ISO 9001 :2015 and ISO 14001 : 2015
- DIRECTIVE 2014/68/EU : Products excluded from directive (Article 4, § 3)
- Threaded male and female BSP cylindrical ends according to ISO 228-1