ADL APPENDAGES

REF. 681

BRASS BIBCOCK BALL VALVE WITH BRASS HANDLE 2/3-1/3 MALE BSP ACS 4MS

Brass ball bibcock valve with brass handle 2/3-1/3 for water distribution.
With hose coupling and manifold.
PTFE packing.
French water agreement (ACS) for drinking water.



Size :	DN1/2"-3/4"
Connection :	Male BSP, hose coupling
Min Temperature :	+0°C
Max Temperature :	+60°C
Max Pressure :	16 Bars
Specifications :	With hose coupling With manifold Brass handle 2/3-1/3 PTFE packing
Materials :	Brass CW617N-4MS according to EN 12165

BRASS BIBCOCK BALL VALVE WITH BRASS HANDLE 2/3-1/3 MALE BSP ACS 4MS

SPECIFICATIONS :

- With hose coupling
- With manifold
- Solid ball
- PTFE packing
- Brass handle 2/3-1/3

USE :

- Water distribution
- Min Temperature Ts : + 0°C
- Max Temperature Ts : + 60°C
- Max Pressure Ps : 16 Bars

RANGE :

- Brass body bibcock valve BSP threaded with hose coupling and brass handle 2/3-1/3 **Ref. 681** DN 1/2"-3/4"



- Locking device SFERALOCKING (without valve) **Ref. 9810404** (only for Ref.681 and 682 DN 1/2“)
- Passkey for locking device SFERALOCKING **Ref. 9810403**


Gegevens ter indicatie, wijzigingen voorbehouden.

ADL APPENDAGES

REF. 681

BRASS BIBCOCK BALL VALVE WITH BRASS HANDLE 2/3-1/3 MALE BSP ACS 4MS

MATERIALS :

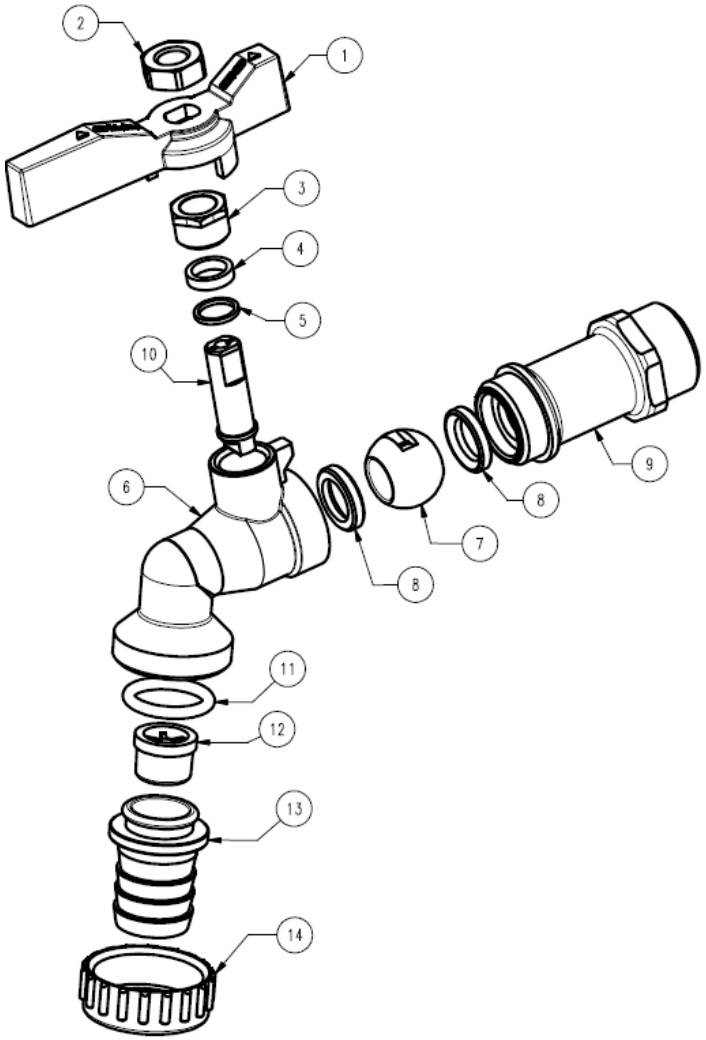

Item	Designation	Materials
1	Handle	Brass CB754S according to EN1982
2	Handle screw	Brass CW617N-4MS according to EN 12164
3	Packing nut	Brass CW617N-4MS according to EN 12164
4	Packing	PTFE
5	Ring	Brass CW617N-4MS according to EN 12164
6	Body	Brass CW617N-4MS according to EN 12165
7	Ball	Brass CW617N-4MS according to EN 12164 chromed
8	Seat	PTFE
9	Nipple	Brass CW617N-4MS according to EN 12165
10	Stem	Brass CW617N-4MS according to EN 12164
11	Gasket	NBR
12	Manifold	Polypropylene
13	Hose coupling	Brass CW614N-4MS according to EN 12164
14	Nut	Brass CW617N-4MS according to EN 12165


Gegevens ter indicatie, wijzigingen voorbehouden.

ADL APPENDAGES

REF. 681

BRASS BIBCOCK BALL VALVE WITH BRASS HANDLE 2/3-1/3 MALE BSP ACS 4MS

SIZE (in mm) :

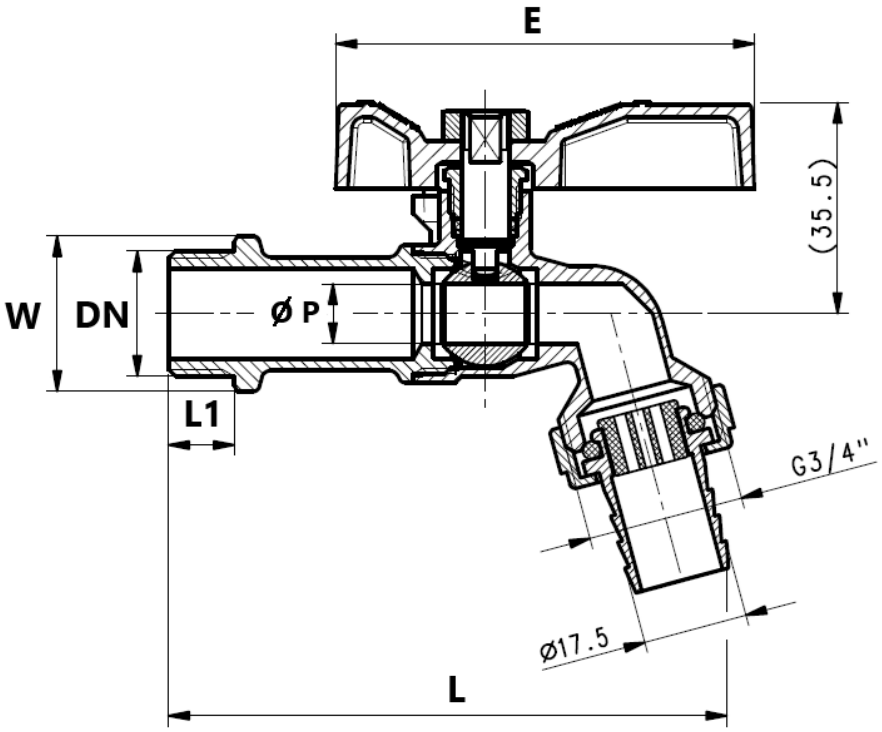

DN	1/2"
Ø P	10
L	93.5
L1	11
E	70
W (on flat)	24
Weight (Kg)	0.22
Ref.	681045

STANDARDS :

- Manufacturer certified ISO 9001 : 2015 and ISO 14001 : 2015
- DIRECTIVE 2014/68/EU : Products excluded from directive (Article 1, § 2b)
- French water agreement **A.C.S. N° 24 ACC LY 115**
- Male BSP cylindrical threaded according to ISO 228-1