

MINI BRASS BALL VALVE MALE MALE BSP 4MS

Mini 4MS brass ball valves male male reduced bore with flat sealing face for water distribution and air compressed without lubricating.

1 EPDM O-ring on anti blow-out stem.

Short length with aluminium black handle.



Size : DN1/4" to DN1/2"

Connection : Male, Male BSP

Min Temperature : -10°C

Max Temperature : +90°C

Max Pressure : 16 Bars

Specifications : Anti blow-out stem

Short length

Reduced bore

1 EPDM O-ring on stem

Materials : Brass CW617N-4MS according to EN12165

MINI BRASS BALL VALVE MALE MALE BSP 4MS

SPECIFICATIONS :

- 4MS Brass CW617N-4MS
- Anti blow-out stem
- Solid ball
- 1 EPDM O ring on stem
- Black aluminium handle
- Flat sealing face


USE :

- Water distribution
- Compressed air : 10 bars maxi
- Min Temperature Ts : - 10°C
- Max Temperature Ts :+ 90°C
- Max Pressure Ps : 16 bars

RANGE :

- Mini brass ball valve Male / Male BSP **Ref. 690** from DN1/4" to 1/2"


MINI BRASS BALL VALVE MALE MALE BSP 4MS

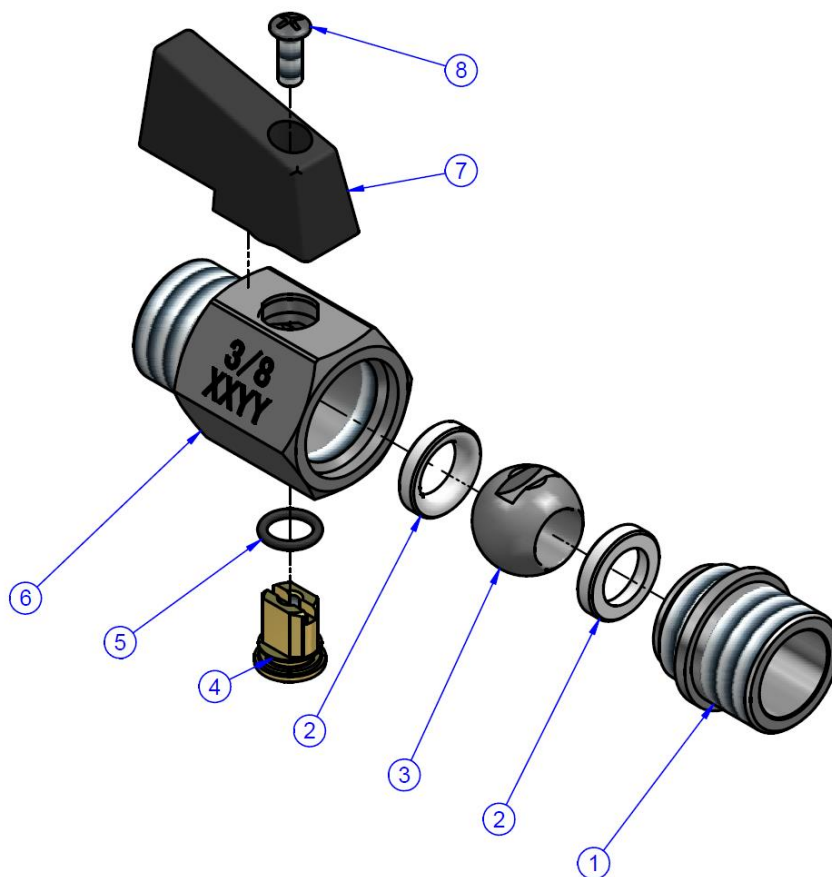MATERIALS :

Item	Designation	Materials
1	Nipple	Nickel brass CW617N-4MS according to EN 12165
2	Seat	PTFE
3	Ball	Chromed brass
4	Stem	Brass
5	O-ring	NBR
6	Body	Nickel brass CW617N-4MS according to EN 12165
7	Handle	Aluminium AL-46100
8	Handle screw	Galvanized Steel Q235

MINI BRASS BALL VALVE MALE MALE BSP 4MS

SIZE (in mm) :

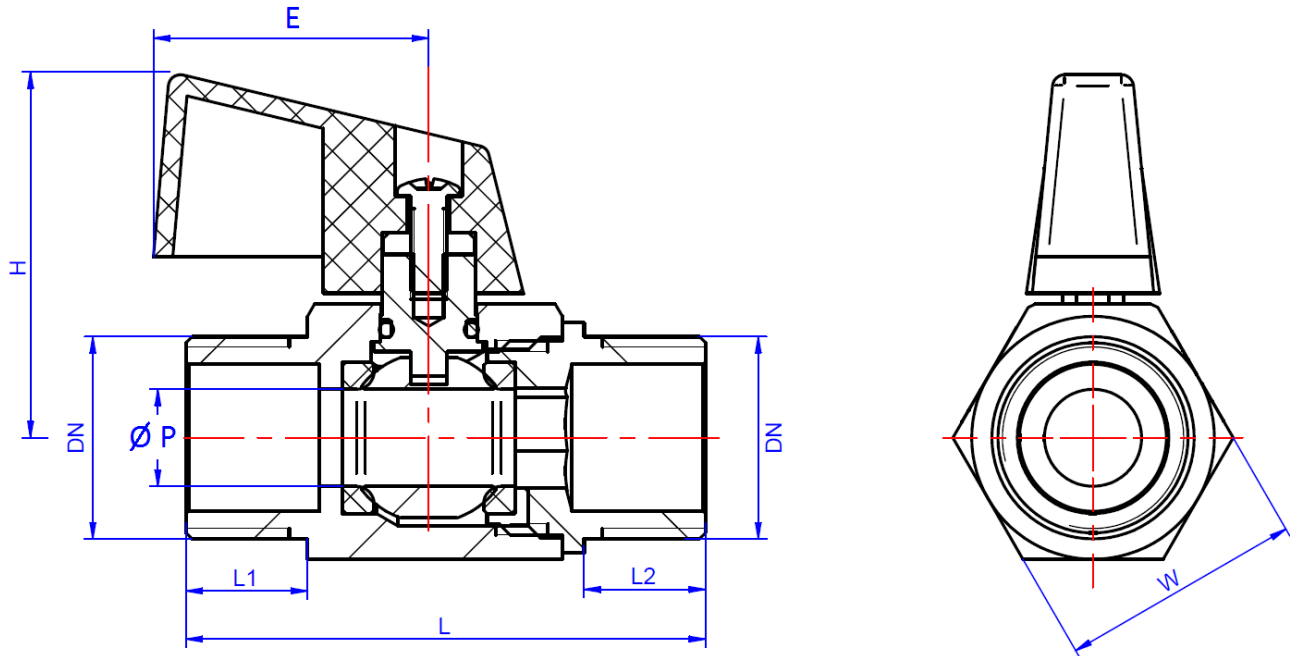

DN	1/4"	3/8"	1/2"
Ø P	8	8	10
L	40.8	42.8	49
L1	9	10	11.5
L2	9	10	11.5
H	30	30	31.5
E	22.7	22.7	22.7
W	20	20	24
Weight (in Kg)	0.07	0.07	0.12
Ref.	690002	690003	690004

STANDARDS :

- Manufacturer certified ISO 9001 : 2015 and ISO 14001 : 2015
- DIRECTIVE 2014/68/EU : Products excluded from directive (Article 1, § 2b)
- Threaded male BSP cylindrical ends according to ISO 228-1