ADL APPENDAGES

REF. 696

BRASS BIBCOCK BALL VALVE PN16 ACS

Brass 4MS bibcock valve ACS , ball valve type with lever or butterfly handle 1/4 turn.
With hose coupling and manifold.
PTFE packing.
Suitable for drinking water thanks to the French water agreement ACS .



Size :	DN1/2" to DN1"
Connection :	Male BSP, hose coupling
Min Temperature :	+0°C
Max Temperature :	+60°C
Max Pressure :	16 Bars
Specifications :	With hose coupling With manifold Flat steel handle or butterfly handle PTFE packing
Materials :	Brass CW617N-4MS according to EN 12165

BRASS BIBCOCK BALL VALVE PN16 ACS

SPECIFICATIONS :

- With hose coupling
- With manifold
- Solid ball
- PTFE packing
- Flat steel handle or aluminium butterfly handle

USE :

- Water distribution
- Min Temperature Ts : + 0°C
- Max Temperature Ts :+ 60°C
- Max Pressure Ps : 16 Bars


RANGE :

- Male BSP with hose coupling and red flat steel handle **Ref. 6960** from DN 1/2" to 1"
- Male BSP with hose coupling and red aluminium butterfly handle **Ref. 6961** from DN 1/2" to 1"
- Male BSP with hose coupling and blue flat steel handle **Ref. 6962 D**N 3/4"-3/4"

Gegevens ter indicatie, wijzigingen voorbehouden.

BRASS BIBCOCK BALL VALVE PN16 ACS

MATERIALS WITH FLAT STEEL HANDLE :

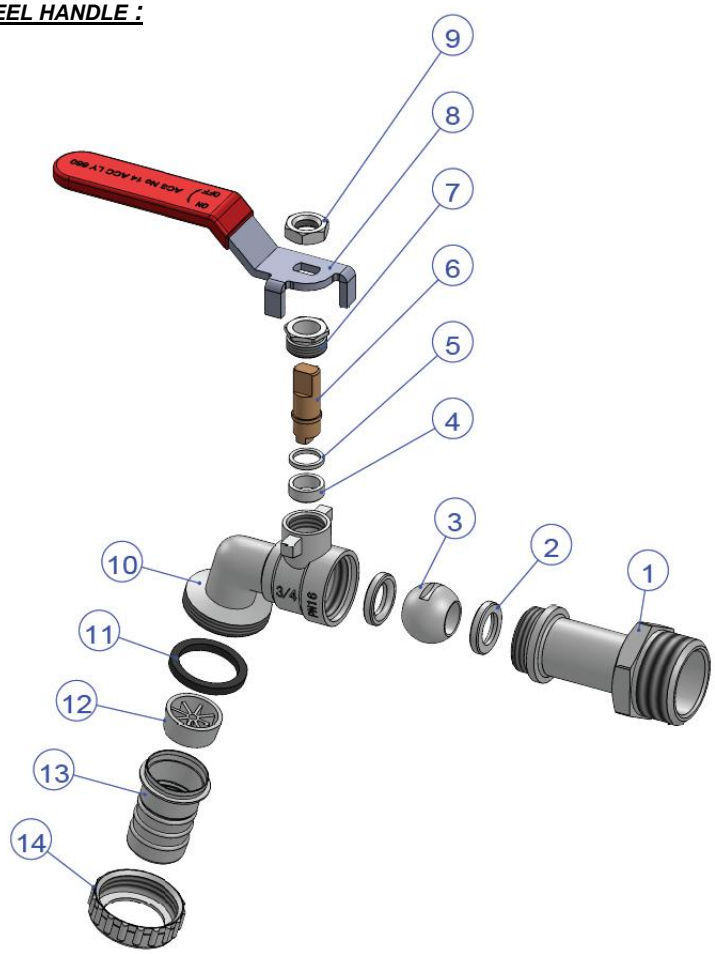


Item	Designation	Materials Ref.6960 and Ref.6962
1	Ends (external)	Brass CW617N-4MS nickeled according to EN12165
1	Ends (internal)	Brass CW617N-4MS according to EN12165
2	Seat	PTFE
3	Ball	Brass CW617N-4MS chromed according to EN12165
4	Packing	PTFE
5	Gland pack	Brass CW617N-4MS according to EN12165
6	Stem	
7	Packing nut	
8	Lever	Zingued carbon steel
9	Lever nut	Carbon steel Dacromet coated
10	Body (external)	Brass CW617N-4MS nickeled according to EN12165
10	Body (internal)	Brass CW617N-4MS according to EN12165
11	Gasket	NBR
12	Manifold	POM
13	Hose coupling	AISI 202
14	Nut	Brass CW617N-4MS nickeled according to EN12165

Gegevens ter indicatie, wijzigingen voorbehouden.

BRASS BIBCOCK BALL VALVE PN16 ACS

MATERIALS WITH BUTTERFLY HANDLE :

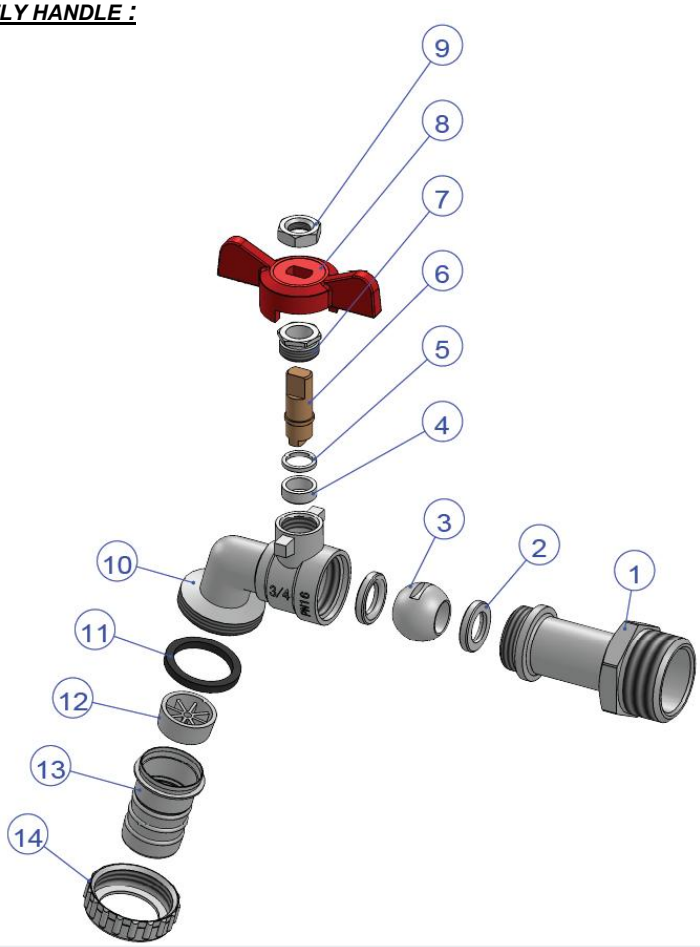


Item	Designation	Materials Ref.6961
1	Ends (external)	Brass CW617N-4MS nickeled according to EN12165
1	Ends (internal)	Brass CW617N-4MS according to EN12165
2	Seat	PTFE
3	Ball	Brass CW617N-4MS chromed according to EN12165
4	Packing	PTFE
5	Gland pack	Brass CW617N-4MS according to EN12165
6	Stem	
7	Packing nut	
8	Butterfly handle	Aluminium AL-46100
9	Lever nut	Carbon steel Dacromet coated
10	Body (external)	Brass CW617N-4MS nickeled according to EN12165
10	Body (internal)	Brass CW617N-4MS according to EN12165
11	Gasket	NBR
12	Manifold	POM
13	Hose coupling	AISI 202
14	Nut	Brass CW617N-4MS nickeled according to EN12165

ADL APPENDAGES

REF. 696

BRASS BIBCOCK BALL VALVE PN16 ACS


SIZE Ref.6960 and 6962 (in mm) :

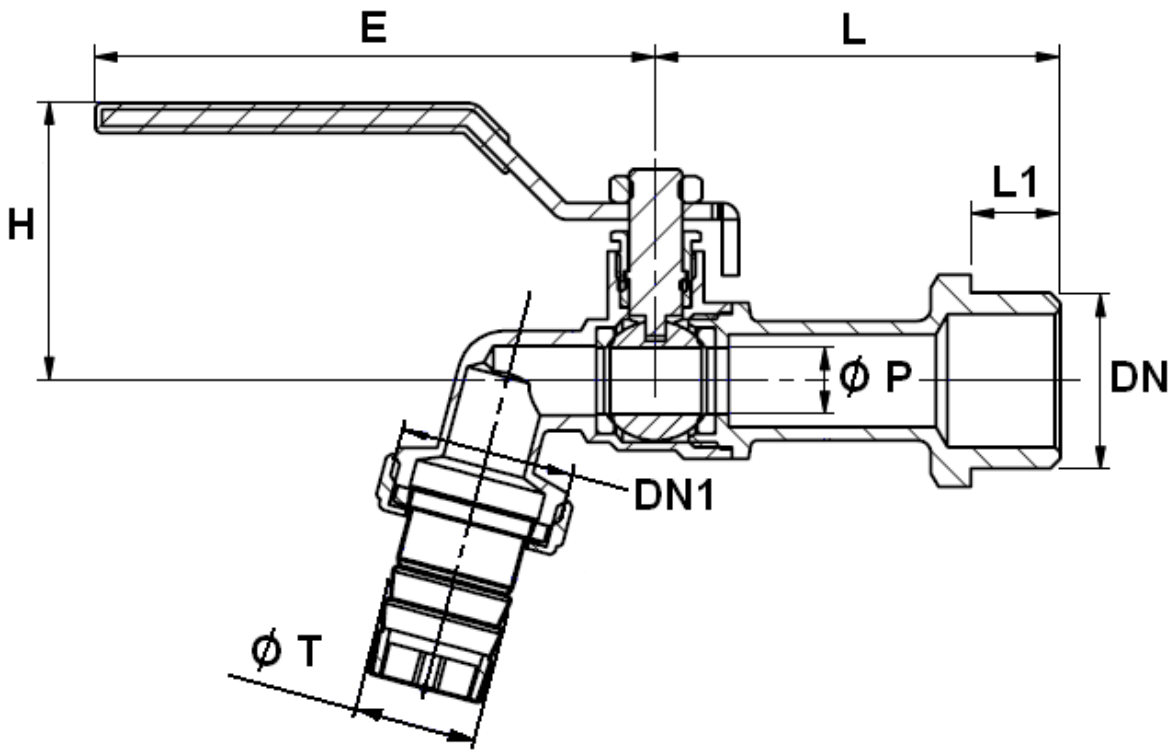

DN	1/2"	3/4"	3/4"
DN1	3/4"	3/4"	1"
Ø T	19	19	20.4
Ø P	10	10	12
L	55	61	66.5
L1	13	13.5	14
E	84.5	84.5	84.5
H	41.7	41.7	42.6
Weight (Kg)	0.18	0.21	0.28
Ref.	696045	696055-696255	696056

BRASS BIBCOCK BALL VALVE PN16 ACS

SIZE Ref.6961 (in mm) :

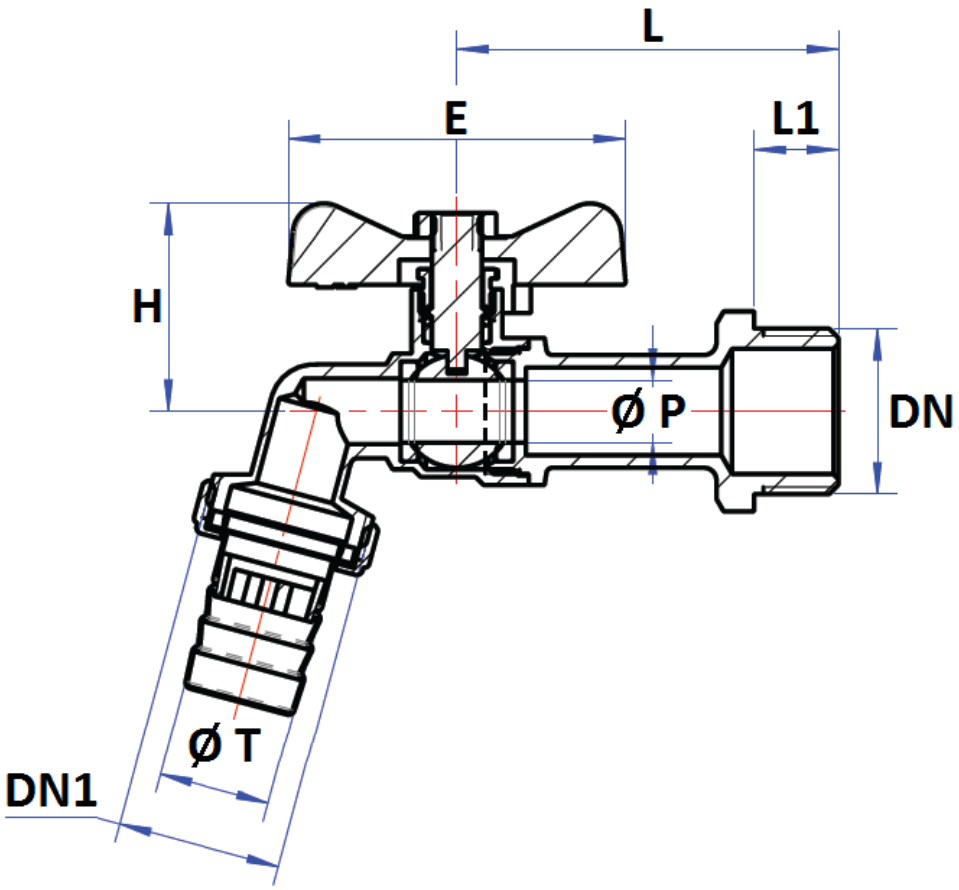

DN	1/2"	3/4"	3/4"
DN1	3/4"	3/4"	1"
Ø T	19	19	20.4
Ø P	10	10	12
L	55	61	66.5
L1	13	13.5	14
E	54	54	54
H	33.2	33.2	34
Weight (Kg)	0.15	0.19	0.26
Ref.	696145	696155	696156

BRASS BIBCOCK BALL VALVE PN16 ACS

STANDARDS :

- Manufacturer certified ISO 9001 : 2015 and ISO 14001 :2015
- DIRECTIVE 2014/68/EU : Products excluded from directive (Article 1, § 2b)
- French water agreement **A.C.S. N° 25 ACC LY 492**
- Threaded Male BSP cylindrical ends according to ISO 228-1