ADL APPENDAGES

REF. 698

NO FROST BRASS BIBCOCK BALL VALVE BSP

No frost brass bibcock valve, ball valve type with handwheel 3 positions.
With hose coupling, manifold.
2 NBR O-rings on stem.



Size :	DN1/2"-3/4"
Connection :	Male BSP, hose coupling
Min Temperature :	-10°C
Max Temperature :	+90°C
Max Pressure :	20 Bars
Specifications :	With hose coupling With manifold No frost device 2 NBR O rings on stem
Materials :	Brass CW617N-4MS according to EN 12165

Gegevens ter indicatie, wijzigingen voorbehouden.

NO FROST BRASS BIBCOCK BALL VALVE BSP


SPECIFICATIONS :

- No frost type
- ¼ turn handle with 3 positions
- 2 NBR O ring on stem
- Blue ABS handle
- With hose coupling and stream cut

USE :

- Water distribution
- Min Temperature Ts : - 10°C
- Max Temperature Ts :+ 90°C
- Max Pressure Ps : 20 bars

HEAD LOSS GRAPH :

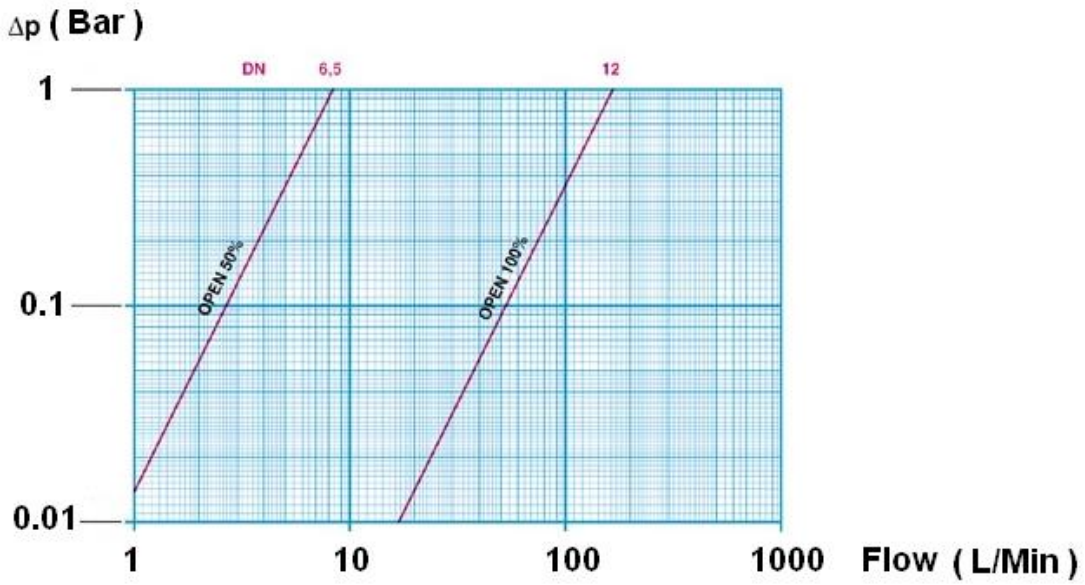

RANGE :

- No frost bibcock valve Male entry 1/2" –male 3/4" output with hose D.16 mm **Ref. 698045**


ADL APPENDAGES

REF. 698

NO FROST BRASS BIBCOCK BALL VALVE BSP

FUNCTIONING :

Position 0 **Position 1** **Position ½**

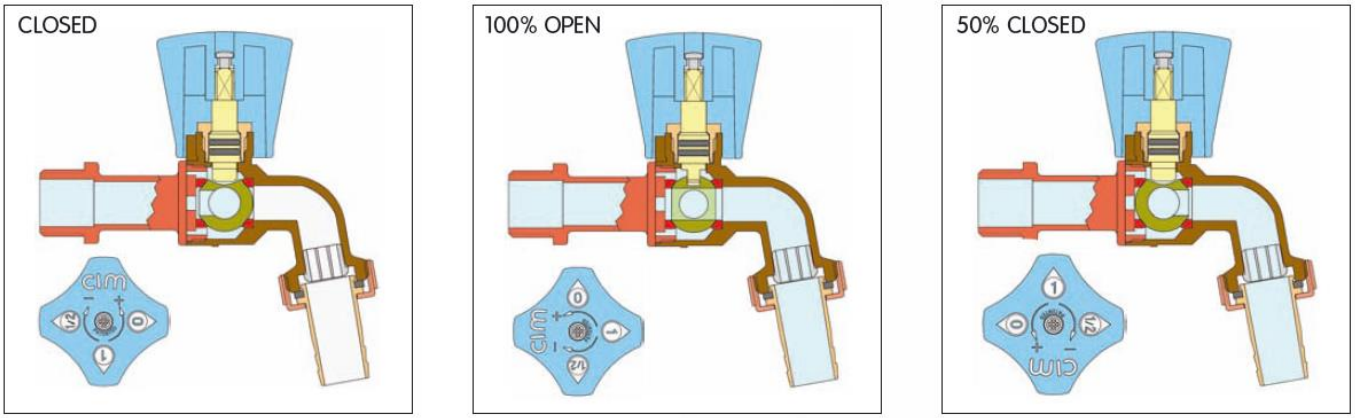

POSITION 0 **POSITION 1** **POSITION 1/2**

Position 0 : The valve is closed, water is stopped

Position 1 : The valve is 100% opened


Position ½ : The valve is 50% closed : **No frost position**. To prevent water from flowing at 50% at the exit of the valve, close the valve installed at the beginning of the installation.

ADL APPENDAGES

REF. 698

NO FROST BRASS BIBCOCK BALL VALVE BSP

MATERIALS :

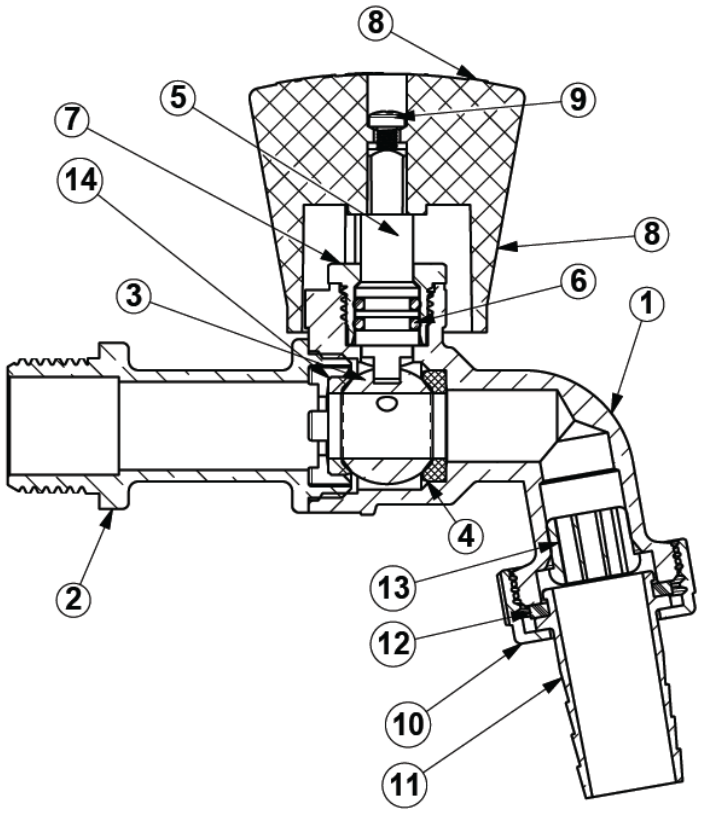

Item	Designation	Materials
1	Body	Chromed Brass CW 617-4MS N according to EN 12165
2	Bonnet	
3	Ball	
4	Seat	PTFE
5	Stem	Brass CW 617N-4MS according to EN 12165
6	O ring	FKM
7	Nut	Brass CW 617N-4MS according to EN 12165
8	Handle	Blue ABS
9	Handle screw	AISI 304
10	Nut	Brass CW 617N according to EN 12165
11	Hose coupling	Brass CW 617N-4MS according to EN 12165
12	Gasket	EPDM
13	Stream cut	Polypropylene
14	Seat	PTFE


Gegevens ter indicatie, wijzigingen voorbehouden.


ADL APPENDAGES

REF. 698

NO FROST BRASS BIBCOCK BALL VALVE BSP

SIZE (in mm) :

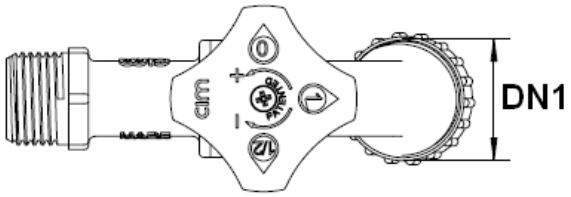

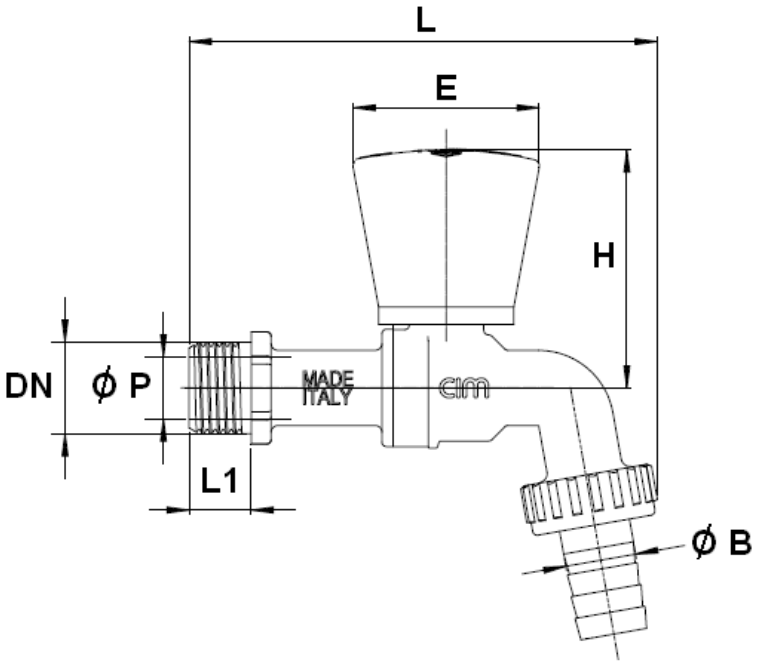

Ref.	DN	1/2"
698045	DN1	3/4"
	Ø P	10
	Ø B	16
	L	106
	L1	14
	H	54
	E	42
	Weight (Kg)	0.26

NO FROST BRASS BIBCOCK BALL VALVE BSP

STANDARDS :

- Manufacturer certified ISO 9001 : 2015
- DIRECTIVE 2014/68/EU : Products excluded from directive (Article 1, § 2b)
- Threaded Male BSP cylindrical ends according to ISO 228-1

Gegevens ter indicatie, wijzigingen voorbehouden.