ADL APPENDAGES

REF. 795

STAINLESS STEEL BIBCOCK BALL VALVE LOCKABLE

Stainless steel bibcock valve with locking device, ball valve type with lever 1/4 turn.
With hose coupling and manifold.
2 FKM O rings on stem.



Size :	DN1/2" to DN3/4"
Connection :	Male BSP, hose coupling
Min Temperature :	-10°C
Max Temperature :	+150°C
Max Pressure :	16 Bars
Specifications :	With hose coupling With manifold Locking device Anti blow-out stem
Materials :	Stainless steel ASTM A351 CF8M

Gegevens ter indicatie, wijzigingen voorbehouden.

ADL APPENDAGES

REF. 795

STAINLESS STEEL BIBCOCK BALL VALVE LOCKABLE

SPECIFICATIONS :

- With hose coupling
- Anti blow-out stem
- Solid ball
- Stem seal with 2 O-rings FKM
- Stainless steel handle
- Locking device

USE :

- Chemical and pharmaceutical industries, petrochemical industries, hydraulic installation, compressed air
- Min Temperature Ts : - 10°C
- Max Temperature Ts :+ 150°C
- Max Pressure Ps : 16 Bars

RANGE :

- Stainless steel bibcock valve Male BSP with hose coupling Ø 16 **Ref. 795** DN 1/2" to 3/4"


Gegevens ter indicatie, wijzigingen voorbehouden.

ADL APPENDAGES

REF. 795

STAINLESS STEEL BIBCOCK BALL VALVE LOCKABLE

MATERIALS :

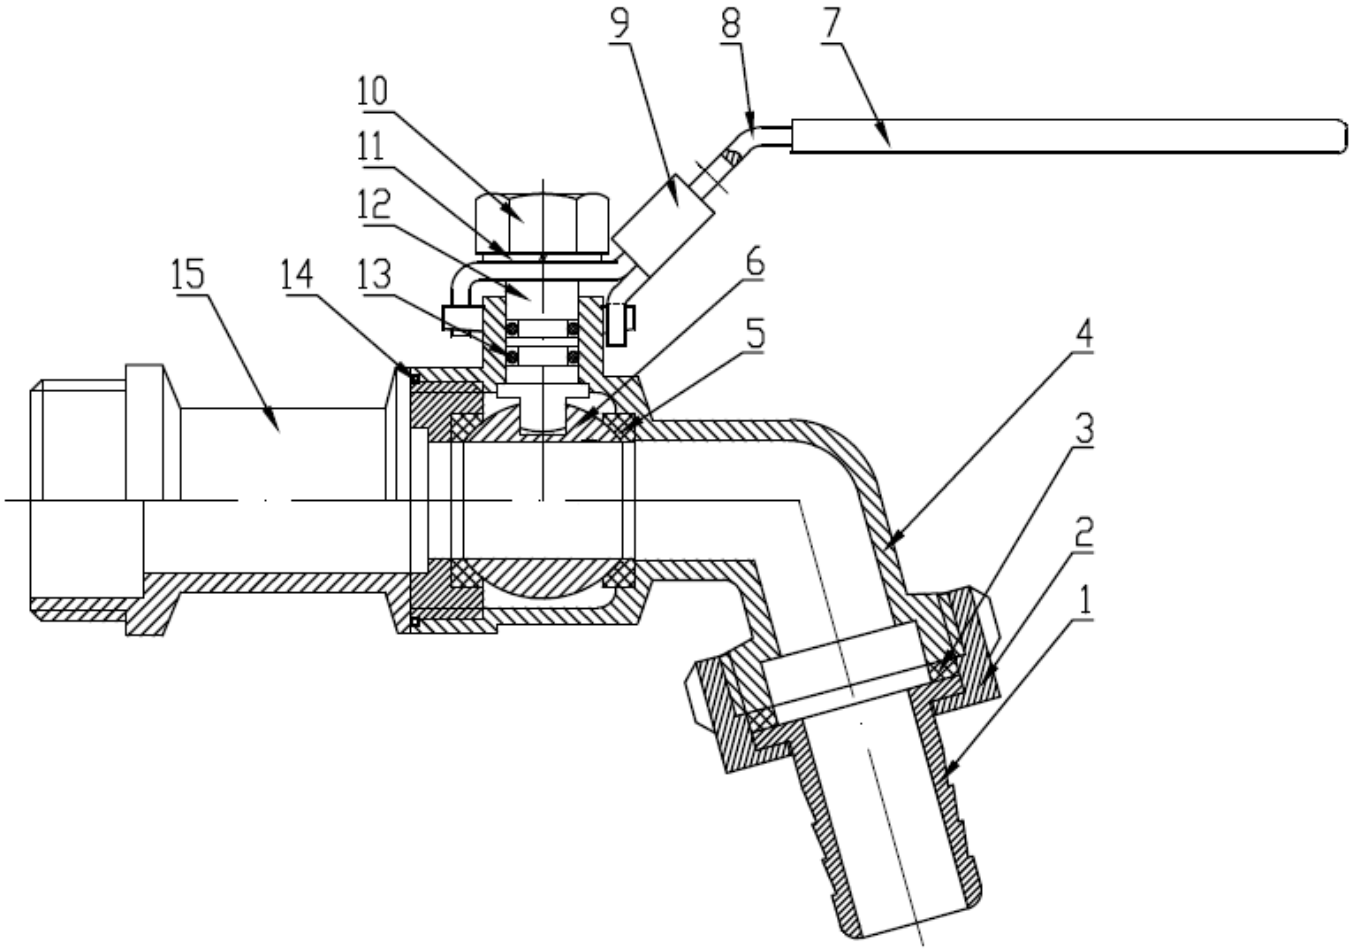


Item	Designation	Materials
1	Hose	ASTM A351 CF8M
2	Hose nut	
3	Gasket	NBR
4	Body	ASTM A351 CF8M
5	Seat	PTFE filled with 15% glass fiber
6	Ball	AISI 316
7	Handle cover	Plastic
8	Handle	AISI 304
9	Locking device	
10	Handle nut	
11	Washer	
12	Stem	AISI 316
13	O ring	FKM
14	Gasket	PTFE
15	End	ASTM A351 CF8M

Gegevens ter indicatie, wijzigingen voorbehouden.

STAINLESS STEEL BIBCOCK BALL VALVE LOCKABLE

SIZE (in mm) :

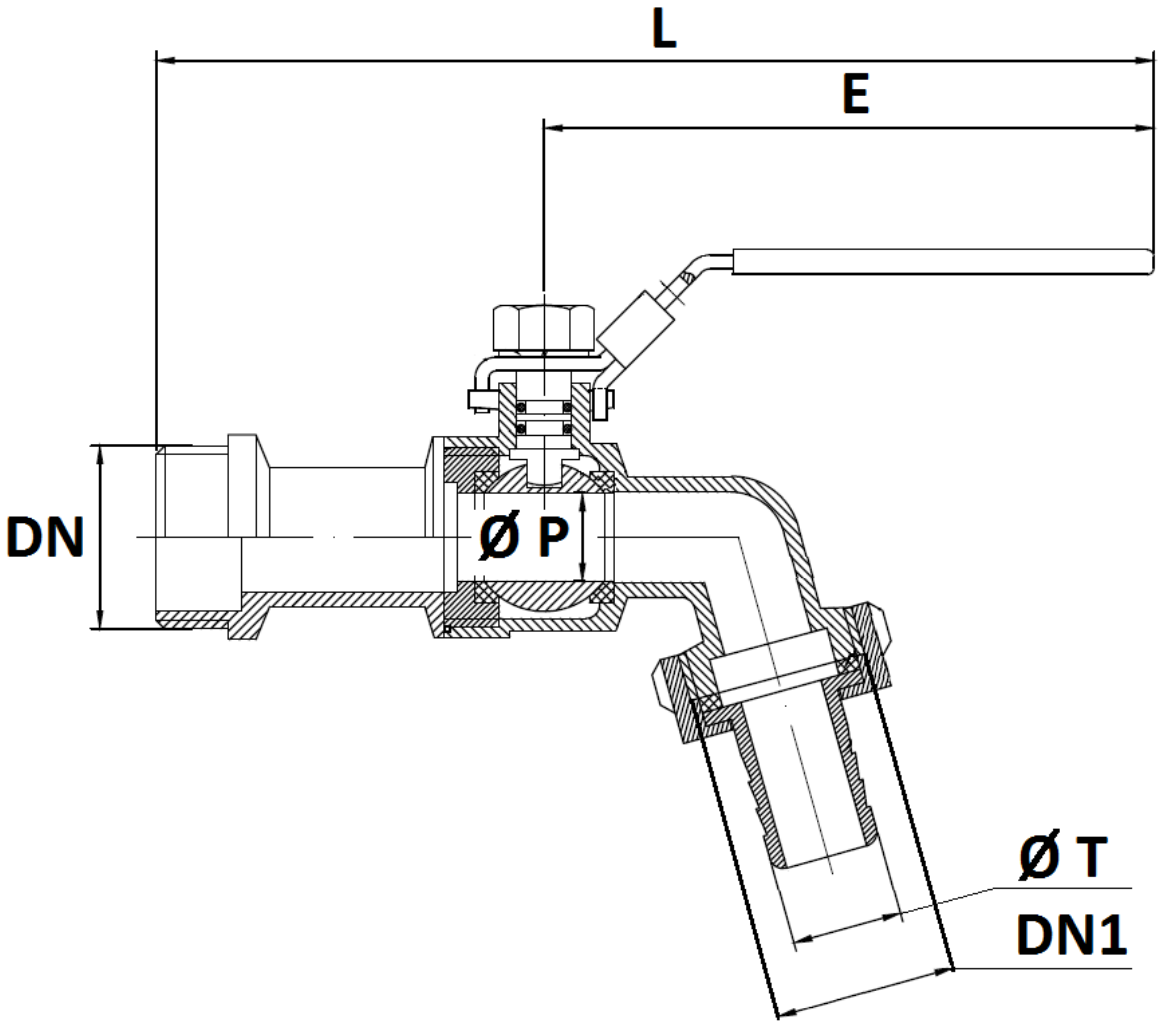

DN	1/2"	3/4"
DN1	3/4"	3/4"
Ø T	16	16
Ø P	9.2	12.5
E	94	94
L	147	156.5
Weight(Kg)	0.22	0.28
Ref.	795045	795055

ADL APPENDAGES

REF. 795

STAINLESS STEEL BIBCOCK BALL VALVE LOCKABLE

STANDARDS :

- Manufacturer certified ISO 9001 :2015
- DIRECTIVE 2014/68/EU : Products excluded from directive (Article 4, § 3)
- Threaded male BSP cylindrical according to ISO 228-1