

PP STRAINER

FOR CV - CB DOUBLE UNION SPRING CHECK VALVE

FEATURES

The PP strainer is suitable on the double union spring CV type and ball CB type check valves. It allows a first primary filtration upstream of pump. The strainer is suitable for vertical installation. It is certified for naval applications.


AVAILABLE MODELS

Strainer : PP

Diameter : DN15 to DN50.



LIMITS OF USE

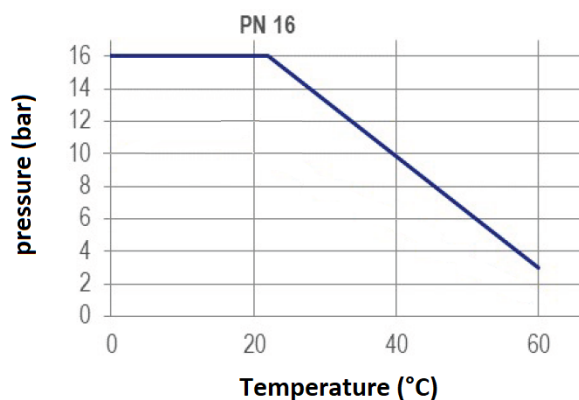

The limits of each material are valid for the nominal pressures indicated, and for a service life of 25 years. These are indicative values for non-hazardous transported materials (DIN 2403), for which the valve material is resistant. Please contact us.







PP STRAINER

FOR CV - CB DOUBLE UNION SPRING CHECK VALVE

DIMENSIONS (mm)

DN	d	A	B	C	H	H1	H2	Weight (kg)
15	20	25	29	37	39	4	9	0,005
20	25	31	35	43	50	6	11,5	0,075
25	32	41	45	51	59,5	5,5	11,5	0,105
32	40	50	54	62	69,5	7	13,5	0,155
40	50	61	64	73	68,5	6,5	14	0,185
50	63	72	77	88,5	83	7,5	14,5	0,295

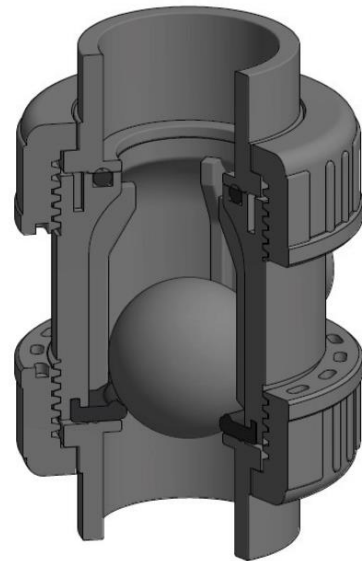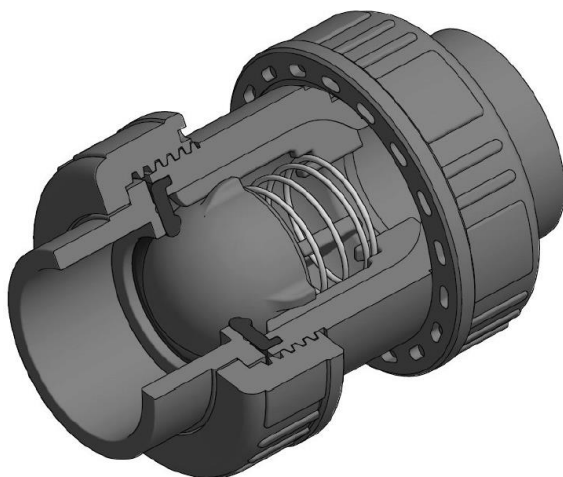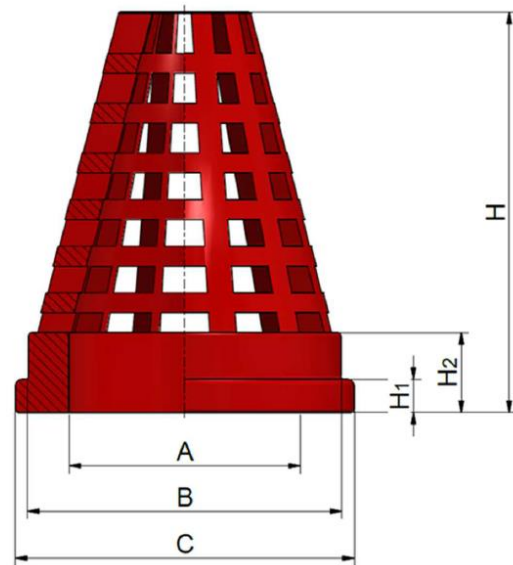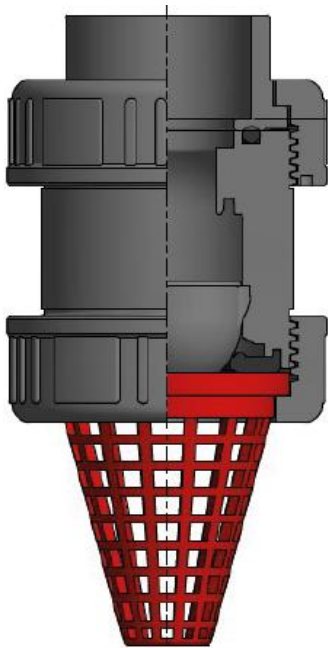

Information given as an indication only, and subject to possible modifications

			Pages	2/2
			Ref.	TDSCREP-CV-CB ENG
			Date	02/2024
ADL Apperdages Voltastraat 94A, 7006 RW Doetinchem T +31 314 641 774 info@adl.nu webshop.adl.nu				
Pagina 2 van 2				
Gegevens ter indicatie, wijzigingen voorbehouden.				