ADL APPENDAGES

REF. 699

BIBCOCK BRASS BALL VALVE WITH LOCKING DEVICE

Brass 4MS bibcock valve ACS with locking device, ball valve type with lever 1/4 turn.
With hose coupling and manifold.
2 NBR O rings on stem.
Suitable for drinking water thanks to the French water agreement ACS .



Size :	DN1/2" to DN3/4"
Connection :	Male BSP, hose coupling
Min Temperature :	-10°C
Max Temperature :	+60°C
Max Pressure :	16 Bars
Specifications :	With hose coupling With manifold Locking device Anti blow-out stem
Materials :	Brass CW617N-4MS according to EN 12165

ADL APPENDAGES

REF. 699

BIBCOCK BRASS BALL VALVE WITH LOCKING DEVICE

SPECIFICATIONS :


- With hose coupling
- With manifold
- Anti blow-out stem
- Solid ball
- Stem seal with 2 O-rings
- Steel handle
- Locking device

USE :

- Water distribution
- Min Temperature Ts : - 10°C
- Max Temperature Ts :+ 60°C
- Max Pressure Ps : 16 Bars

RANGE :

- Bibcock valve Male BSP with hose coupling Ø 19 **Ref. 699** DN 1/2" to 3/4"

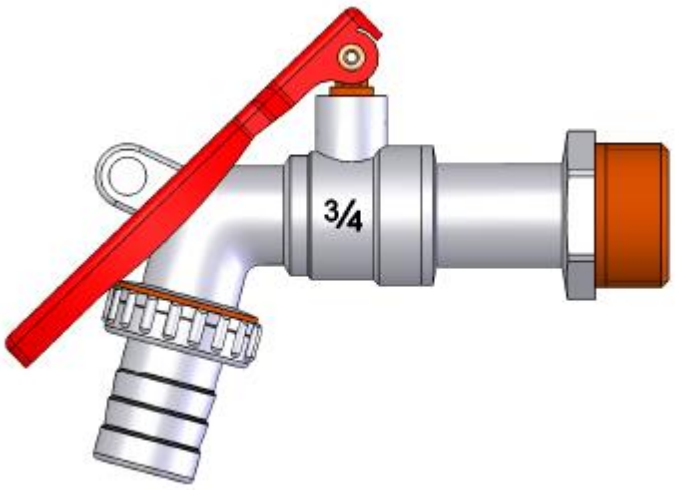


ADL APPENDAGES

REF. 699

BIBCOCK BRASS BALL VALVE WITH LOCKING DEVICE

MATERIALS :

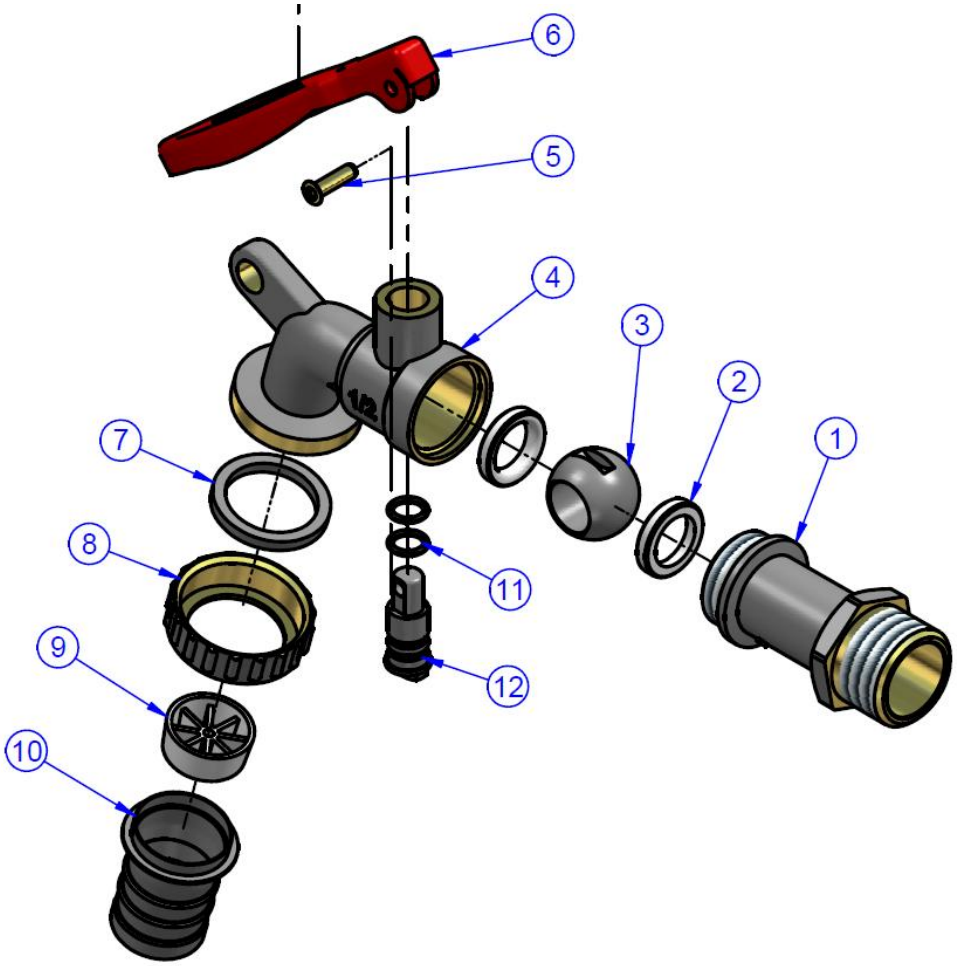

Item	Designation	Materials
1	Ends	Brass CW617N-4MS according to EN 12165 nickeled external and natural inside
2	Seat	PTFE
3	Ball	Brass CW617N-4MS according to EN 12165 chromed
4	Body	Brass CW617N-4MS according to EN 12165 nickeled external and natural inside
5	Pin	H62
6	Handle	Carbon steel
7	Gasket	NBR
8	Nut	Brass CW617N-4MS according to EN 12165 nickeled external and natural inside
9	Manifold	POM
10	Outlet	AISI 202
11	O ring	NBR
12	Stem	Brass CW617N-4MS according to EN 12165 nickeled


Gegevens ter indicatie, wijzigingen voorbehouden.

ADL APPENDAGES

REF. 699

BIBCOCK BRASS BALL VALVE WITH LOCKING DEVICE

SIZE (in mm) :

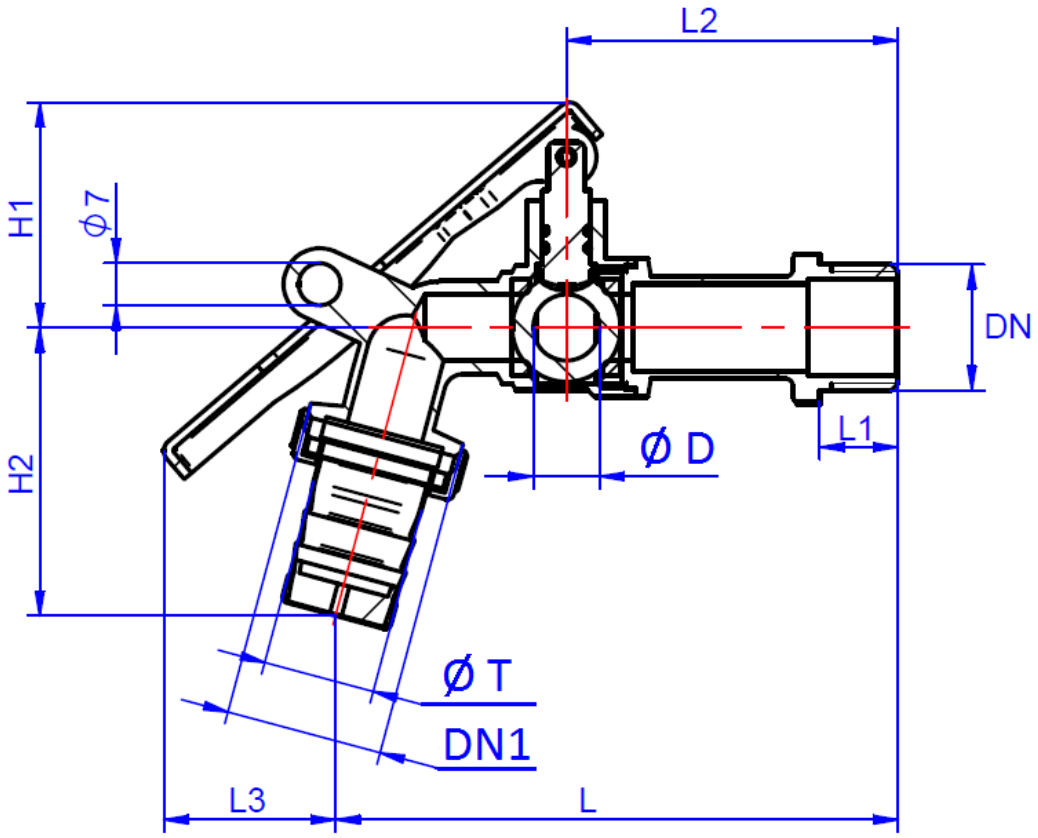

DN	1/2"	3/4"
DN1	3/4"	3/4"
Ø T	19	19
Ø D	11	12
L	93.3	97.2
L1	13	13.5
L2	55	58.5
L3	28.5	28.1
H1	37.3	38.1
H2	47.8	47.3
Weight (Kg)	0.18	0.21
Ref.	699045	699055

ADL APPENDAGES

REF. 699

BIBCOCK BRASS BALL VALVE WITH LOCKING DEVICE

STANDARDS :

- Manufacturer certified ISO 9001 : 2015 and ISO 14001 :2015
- DIRECTIVE 2014/68/EU : Products excluded from directive (Article 1, § 2b)
- French water agreement **A.C.S. N° 25 ACC LY 492**
- Threaded male BSP cylindrical ends according to ISO 228-1

Gegevens ter indicatie, wijzigingen voorbehouden.